

09/673264  
529 Rec'd PCT/PTC 12 OCT2000



**MOTOROLA**

European Intellectual Property Operations  
**Patents, Trademarks and Licensing**  
Midpoint, Alençon Link, Basingstoke, Hants RG21 1PL, England

**Inter-Office Correspondence**

Phone: +44(0) 256 790790  
Fax: +44(0) 256 811319

Our ref: CE30418P/SPP/CHIN/afc/THOMAS

5 October 2000

To: Rebecca Nyce - Schaumburg

From: Susan Potts

RECEIVED  
MOTOROLA, INC.

OCT 10 2000

Re: New Patent Application in US under PCT in the name  
Motorola Limited  
Our Case No.: CE30418P  
PCT Serial No. PCT/EP99/03732  
Filed 26 May 1999  
Priority Application 9812409.2  
Filed in United Kingdom on 10 June 1998

Foreign Docketing

Enclosed please find the necessary materials to perfect a filing in the United States under the Patent Co-operation Treaty of a national patent application on the above-identified PCT application. According to Article 39(1)(a) of the PCT please file the national application in United States by 10 December 2000 30 months from the priority date) **for Chapter 2.**

For this purpose we enclose the following:

	<u>Enclosed</u>	<u>Will Follow</u>
Copy of PCT application as published	X	
PCT amendments of claims	None	
Copy of correspondence with the International Bureau (WIPO) and PCT Receiving Office namely: Form PCT/RO/101	X	
Form PCT/ISA/220 and enclosures	X	
Combined Power of Attorney/Declaration		X
Assignment		X
Formal Drawings	X	
Other	X	

# MOBILE COMMUNICATION NETWORK AND METHOD OF OPERATION THEREOF

## Field of the Invention

The present invention relates to a mobile communication network (particularly but not exclusively the Global System for Mobile communication (GSM) network) comprising a group of cells associated with a simulcast carrier and to a method of operation of such a network.

## Background of the Invention

In a cellular mobile communication system each of the mobile stations communicate with a typically fixed base station. Communication from the mobile station to the base station is known as uplink and communication from the base station to the mobile station is known as downlink. The total coverage area of the system is divided into a number of separate cells each covered by a single base station. The cells are typically geographically distinct with an overlapping coverage area with neighbouring cells. As a mobile station moves from the coverage area of one cell to the coverage area of another cell, the communication link will change from being between the mobile station and the base station of the first cell to being between the mobile station the base station of the second cell. This is known as a handover.

Specifically, some cells may lie completely within the coverage of other larger cells. These are known as hierarchical cells and an example is so called microcells which are used to provide a high traffic capacity in high traffic areas. Typically the microcells are small and a large number of cells can be implemented in a limited area. A mobile station moving into the microcell will

be handed over from the overlaying cell, known as the macrocell. This frees up resource at the macrocell and hierarchical cell thus provide the possibility of a large coverage area combined with high traffic capacity.

All base stations are interconnected by a fixed network. This fixed network comprises communication lines, switches, interfaces to other communication networks, various controllers required for operating the network and the base stations themselves. A call from a mobile station is routed through this network to the destination specific for this call. If the call is between two mobile stations of the same communication system the call will be routed through the network to the base station of the cell in which the other mobile station currently is. A connection is thus established between the two serving cells through the network. Alternatively, if the call is between a mobile station and a telephone connected to the Public Switched Telephone Network (PSTN) the call is routed from the serving base station to the interface between the cellular mobile communication system and the PSTN. It is then routed from the interface to the telephone by the PSTN.

A simulcast system is one in which all the cells within an area transmit an identical signal, at the same frequency, at all times. This broadcast signal contains control information and is used as a beacon to determine relative signal strength. Additionally, each cell within the simulcast system can transmit a second frequency upon which traffic can be relayed. The second frequency is different from cell to cell although it may be reused if there is sufficient distance to mitigate interference. As a mobile is likely to remain within this simulcast system during the period of a call and the simulcast carrier effectively creates a single larger umbrella cell, very few intercell (between simulcast cells and external cells) handovers will be required. Consequently, the majority of handovers will be of the intracellular (between the simulcast cells) type. Since there is a single umbrella cell identification the mobile cannot identify the smaller target cells beneath this umbrella cell: i.e. the handover process cannot be mobile assisted i.e. based on the mobile

station differentiating between broadcast carriers. Rather than mobiles identifying cells, the cells identify the target mobiles by making measurements of the strength of neighbour uplink traffic. The stronger the neighbour measurement compared to measurements made by other cells the more probable that the observed mobile will handover into that cell.

The cells can be microcells or picocells for example. Picocells are commonly used inside buildings (where radio propagation through the external walls or internal partitions in the 900 MHz or 1800MHz bands is severely attenuated by metal structures for example) and microcells are commonly used in somewhat larger regions such as city centres for example.

In order to make measurements of the mobile stations in the surrounding simulcast cells the base stations will retune to the frequencies of the traffic carriers in these cells. However, as the frequencies are reused the base stations will measure a combined signal level of the desired mobile station and all mobile stations allocated the same time slot in cells using the same traffic carrier frequency. This may lead to inaccurate measurements and degraded handover performance.

### **Summary of the Present Invention**

One object of the invention is to overcome or alleviate such a disadvantage.

More generally, the invention provides additional flexibility in a mobile network and enables more information to be obtained about the state of the network, as will become apparent.

According to a first aspect of the invention, there is provided mobile communication network comprising a group of cells with a common simulcast

carrier carrying signaling information, at least a first cell being associated with a first traffic carrier, wherein at least a first mobile station is arranged to intermittently perform an intracell handover to the common simulcast carrier, and means for performing measurements of the radio environment when the mobile station is using the common simulcast carrier.

In one embodiment the intracell handover is from the first traffic carrier to the common simulcast carrier.

According to a feature of the invention a clock means is arranged to generate a signal instructing said intracell handover and said clock means is located in a fixed part of the network and is arranged to transmit said signal to one or more mobile stations.

In one embodiment a signal instructing said intracell handover is arranged to be generated in response to a measurement of received signal level or quality of a radio transmission from a mobile station.

According to a different feature of the invention, one or more base stations are arranged to measure a received signal level and/or quality of the signal transmitted by the mobile station on the common simulcast carrier and a handover is determined in response to the measurements.

In one embodiment the mobile communication network is a GSM network.

According to a second aspect of the invention, there is provided a base station operating in a communication system having a group of cells with a common simulcast carrier carrying signaling information and at least a first cell being associated with a first traffic carrier, the base station comprising means for directing a mobile station to intermittently perform an intracell handover to the common simulcast carrier, and means for performing measurements of

the radio environment when the mobile station is using the common simulcast carrier.

According to a third aspect of the invention, there is provided a method of operating a mobile communication network with a group of cells (2) with a common simulcast carrier carrying signaling information and at least a first cell being associated with a first traffic carrier, comprising the steps of: intermittently performing an intracell handover of a first mobile (4,4') station to the common simulcast carrier, and performing measurements of the radio environment when the mobile station (4,4') is using the common simulcast carrier.

### **Brief Description of the Drawings**

A preferred embodiment is described below by way of example only with reference to Figures 1 and 2 of the accompanying drawings, wherein:

Figure 1 is a schematic diagram of a GSM mobile communication network in accordance with this invention, employing a simulcast BCCH carrier which extends over a group of picocells or microcells;

Figure 2 is a timeslot:frequency diagram of a base station in the network of Figure 1.

### **Description of a Preferred Embodiment**

Referring to Figure 1, the GSM network illustrated comprises a group of picocellular heads 1 defining respective picocells 2, each picocell 2 representing the coverage of a respective broadcast carrier signal associated

with each picocellular head. Associated with each of the picocellular heads is a traffic carrier, each traffic carrier having a different frequency from those of at least its nearest neighbouring picocells.

A further simulcast carrier is transmitted from each picocellular head 1 and extends over all the above picocells as illustrated at 11.

The above group of picocells interfaces with in this case two macrocells 3 defined by carriers transmitted from base transceiver stations 8, which are in turn linked by fixed communications links to a common base station controller 9 and thence to the rest of the network. In a variant, the picocells 2 could be microcells and an umbrella cell could overlie the picocells or microcells.

In operation, a control signal generated e.g. by a clock 10 and transmitted over the fixed communications links or alternatively generated in response to a detection of radio signal level and/or quality below a predetermined threshold is broadcast to a mobile station 4 and (as indicated by radio signal 5) instructs the mobile station to perform an intracell handover to an uplink carrier frequency and timeslot corresponding to the simulcast carrier. Such a signal 5 could also be transmitted by a picocellular head 1' to a mobile station 4' as illustrated, the change in frequency being represented by arrow 7.

The structure of signal 5 will now be described in more detail with reference to Figures 2 before describing the response of the mobile stations 4 and 4'.

Figure 2 shows the frequency:timeslot distribution of the various signals transmitted by a base transceiver station (BTS) 8 to its associated macrocell or by a picocellular head 1 to its associated picocell. The group of frequencies (or more accurately frequency bands)  $f_1$  to  $f_5$  available to a given (macro or pico) cell will typically not include any frequencies in common with those used by neighbouring cells, in order to avoid interference. In other respects the

frequency:timeslot distributions of the respective macrocells and picocells are similar.

The carrier is transmitted in slot SL corresponding to timeslot 0 and frequency  $f_5$ , the beacon frequency. The carrier comprises the FCCH, SCH, BCCH, PCH and AGCH channels which carry respective types of control and information data to the mobile stations within the cell, as defined in the GSM specifications. In order to ensure that the most powerful transmission is on the beacon frequency (to enable it to be identified by mobile stations within the cell in order to enable them to access the above control and information data) any slots not used on frequency  $f_5$  are filled with dummy bursts.

The above frequency:timeslot structure is conventional in GSM mobile communication networks. It is now assumed that a call has been established to or from a mobile station within a cell of interest. The mobile station will be communicating using a timeslot TS1 on the traffic carrier frequency of the corresponding picocell. The signal 5 will be carried to the mobile station through a control channel in the time slot SL, for example on the FACCH (Fast Associated Control Channel). The signal 5 will result in the mobile station changing to a time slot TS2 on the BCCH frequency.

Having described the intracellular handover of a mobile station to a new traffic channel on the BCCH carrier, the resulting operation will now be described further with reference to Figure 1. There are a number of choices.

Firstly it will be noted that the timeslot TS1 previously used by the picocellular head 1' to transmit traffic to the mobile within its picocell is no longer used, since this function has been taken over by the radio unit responsible for the simulcast transmission. Accordingly the transceiver (not shown) associated with the picocellular head 1' can be retuned to another frequency during this timeslot and used to make e.g. interference measurements or measurements of mobile station signal level and/or quality

on that frequency. For example a mobile station communicating in a time slot TS3 on the traffic frequency  $f_1$  of the neighbour picocell can be measured by changing the receive frequency from  $f_2$  to  $f_1$  during time slot 6. Alternatively, the receiver can continue to receive on the same frequency  $f_2$  and thus measure the interference level in the absence of the mobile station. This information can then be passed back up to a base station controller 9 and thence to an appropriate part of the fixed network controlling frequency allocation between cells or picocells. A similar procedure could be followed by a base transceiver station 8 associated with a macrocell 3 (or with a microcell, not shown).

Secondly all the picocell transceivers within the coverage 11 of the simulcast BCCH can be arranged to measure the signal level from the mobile station as they all have the BCCH carrier frequency  $f_5$  in common. This information can then be used to select the neighbouring picocell 2 receiving the highest power and/or signal quality for intercellular handover as the mobile station approaches that picocell. This is a desirable facility because the conventional method of cell selection for intercellular handover, involving downlink measurements by mobile stations, the results of which are transmitted to the base transceiver stations, can result in ambiguity as a result of two mobile stations in non-neighbouring picocells but within the simulcast coverage area 11 transmitting on the same frequency. Difficulties can also arise when the mobile stations are fast-moving - e.g. in trains.

Preferably, the mobile station will return to a traffic carrier following the measurements. However, this traffic carrier can be that of a different picocell if the measurements indicate that that will result in better performance.

According to one feature of the invention the signal 5 is generated by a clock which for example periodically instigates a new measurement. The clock can be located centrally in the network and can be distributed through the fixed network to the appropriate picocell heads for transmission to the mobile

stations. Alternatively, the process can be instigated in response to measurements of the current radio transmission. Information of interference levels and possible transmission quality for neighbour base stations is of most importance when the current transmission quality is unsatisfactory and a hand over is required for improved quality. For example, if a mobile station has an unsatisfactory quality level for the current serving picocell it can be instructed to handover to the BCCH carrier where all picocell will be able to measure the signal level from the mobile station. A handover to a given picocell head can then be determined in response to these measurements. Preferably by selecting the picocell which receives the strongest signal level from the mobile station.

The measurement process can thus be instigated in response to a measurement of the signal level or quality of the current transmission. Preferably, the measurement process would be instigated when these levels fell below a given threshold.

According to a feature of the invention the measurements are repeated for a number of mobile stations thereby building up information of the distribution of mobiles within the network.

In a variant of the above embodiment, a mobile station is temporarily assigned to a slot of the simulcast carrier when it originates a call. Uplink measurements similar to those described above are then made at the picocellular heads (or at base transceiver stations associated with microcells) and an appropriate picocell or microcell is assigned to the mobile station on the basis of such measurements. In this embodiment the intracellular handover is thus not from another traffic carrier but rather from a non-active state.

Although an embodiment of the invention has been described in the context of a GSM mobile cellular communication network, it should be noted that the

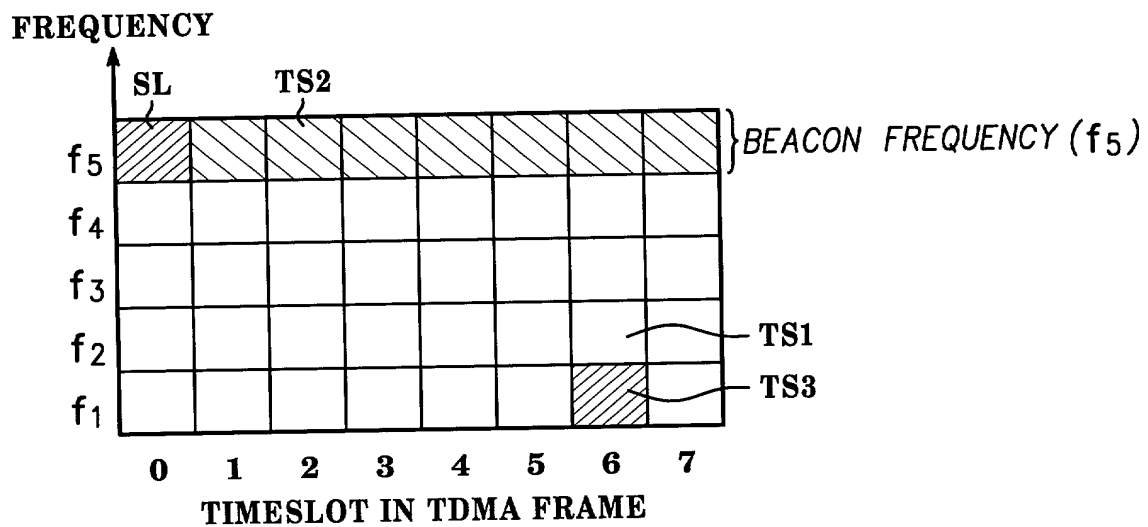
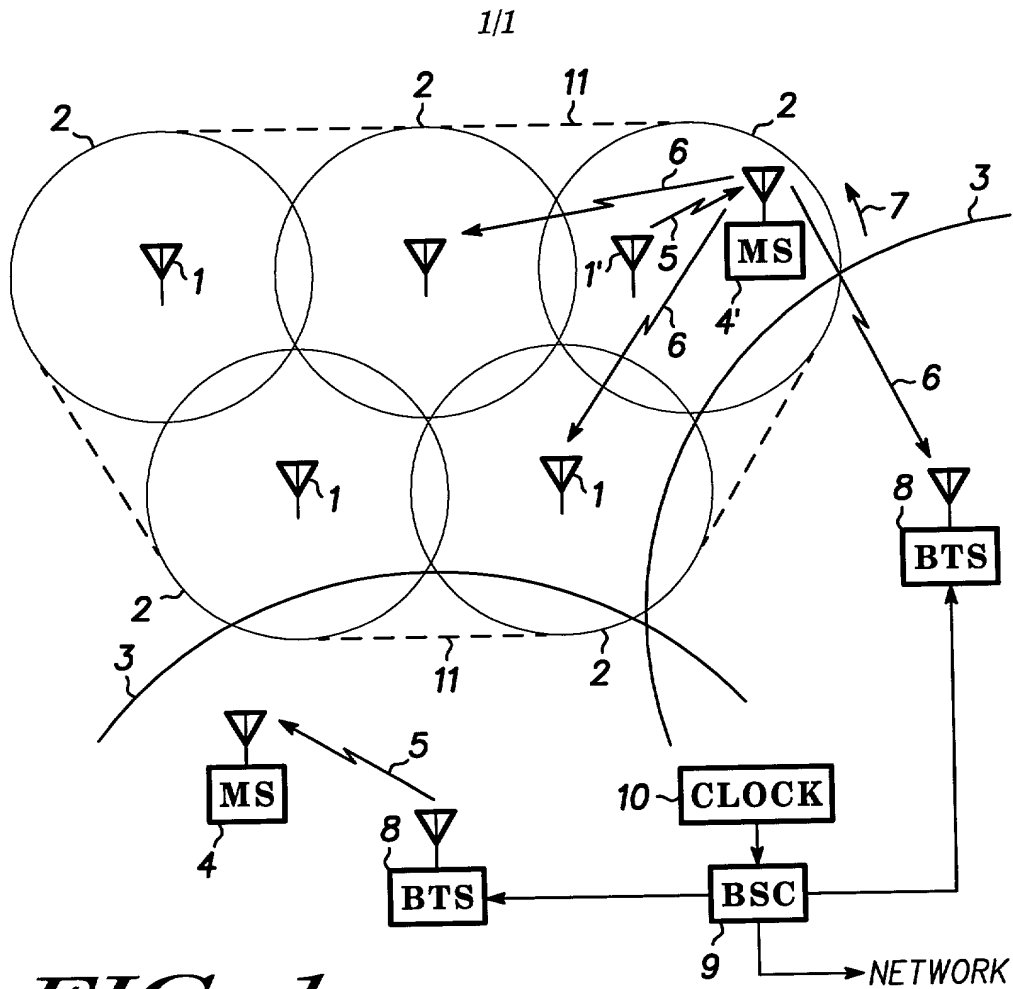
invention is not restricted to such a network but that it is also applicable to other mobile cellular networks such as the NADC network in the USA and the PDC network in Japan.

## Claims

1. A mobile communication network comprising a group of cells (2) with a common simulcast carrier carrying signaling information, at least a first cell being associated with a first traffic carrier, wherein at least a first mobile station (4,4') is arranged to intermittently perform an intracell handover to the common simulcast carrier, and means for performing measurements of the radio environment when the mobile station (4,4') is using the common simulcast carrier.
2. A claim as claimed in claim 1 wherein the intracell handover is from the first traffic carrier to the common simulcast carrier.
3. A mobile communication network as claimed in claim 1 wherein a clock means (10) is arranged to generate a signal instructing said intracell handover.
4. A mobile communication network as claimed in claim 3 wherein said clock (10) means is located in a fixed part of the network and is arranged to transmit said signal to one or more mobile stations.
5. A mobile communication network as claimed in claim 1 wherein a signal instructing said intracell handover is arranged to be generated in response to a measurement of received signal level or quality of a radio transmission from a mobile station.
6. A mobile communication network as claimed in claim 1 wherein one or more base stations (1,1',8) are arranged to measure a received signal level and/or quality of the signal transmitted by the mobile station on the common simulcast carrier.

7. A mobile communication network as claimed in claim 1 wherein a handover is determined in response to the measurements.
8. A mobile communication network as claimed in claim 1 wherein base stations in different cells (1,1',8) are arranged to measure transmitted signal level and/or signal quality from a plurality of mobile stations in such new uplink channels and the network is arranged to process the measurements to determine the distribution of mobile stations within the network.
9. A mobile communication network as claimed in claim 1 wherein a base station (1') of a cell from which the intracell handover is made is arranged to be re-tuned to receive on a frequency different from the first traffic channel while traffic is being handled by the common simulcast carrier.
10. A mobile communication network as claimed in claim 9 wherein the base station (1') of the cell from which the intracell handover is made is arranged to be used to monitor interference on the first traffic carrier while traffic is being handled by the new uplink channel.
11. A mobile communication network as claimed in any preceding claim which is a GSM network.
12. A base station (1,1') operating in a communication system having a group of cells (2) with a common simulcast carrier carrying signaling information and at least a first cell being associated with a first traffic carrier, the base station (1,1') comprising means for directing a mobile station (4,4') to intermittently perform an intracell handover to the common simulcast carrier i, and means for performing measurements of the radio environment when the mobile station (4,4') is using the common simulcast carrier.

	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440</
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	--------

**FIG. 2**

14 DEC 2000

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**

Attorney Docket CE30418P

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled MOBILE COMMUNICATION NETWORK AND METHOD OF OPERATION THEREOF, the specification of which is attached hereto unless the following box is checked:

☒ Application was filed on 26 mAY 1999  
as Application No. pct/ep99/03732  
and was amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		Priority Claimed
<u>9812409.2</u> (Number)	<u>gb</u> (Country)	<u>10 jUNE 1998</u> (Day/Month/Year Filed) <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed) <input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jonathan P. Meyer, Reg. No. 30,477; Doug Fekete, Reg. No. 29,065;  
K. Cyrus Khosravi, Reg. No. 40,375; Steven G Parmelee, Reg. No. 28,790; J. Ray  
Wood, Reg. No. 36,062; Daniel K. Nichols, Reg. No. 29,420; Val Jean Hillman, Reg. No.  
34,841; Susan L. Lukasik, Reg. No. 35,261; Terri S. Hughes, Reg. No. 41,856; Steven R.  
Santema, Reg. No. 40,156.

Address all telephone calls to Mr. Jonathan P. Meyer at telephone no. (847) 576 0173.

Address all correspondence to Jonathan P. Meyer, Motorola, Inc., Intellectual Property  
Section - Law Department, 1303 East Algonquin Road, Schaumburg, IL 60196.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE:
Howard Thomas	<i>Howard Thomas</i>	24-11-00
RESIDENCE:	CITIZENSHIP:	
14 The Avenue, Cirencester GL7 1EJ	United Kingdom	
POST OFFICE ADDRESS:		
Same as above CBX		

FULL NAME OF SECOND INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE:
Thomas Quirke	<i>T. M. Quirke</i>	27-11-00
RESIDENCE:	CITIZENSHIP:	
26 THE BRAMPTONS, SWINDON SN5 5SL 55 Pasture Close, Swindon, Wiltshire SN2 2UH	United Kingdom	
POST OFFICE ADDRESS:		
Same as above CBX		

FULL NAME OF THIRD INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE:
Rorie O'Neil	<i>Rorie O'Neil</i>	29/11/00
RESIDENCE:	CITIZENSHIP:	
29 NORTH STREET, SWINDON SN1 3JX 25 Applewood Court, Westlea, Swindon, Wiltshire SN2 7AH	United Kingdom	
POST OFFICE ADDRESS:		
Same as above CBX		

The application is to be assigned to Motorola Limited located and doing business at  
Jays Close  
Viabes Industrial Estate  
Basingstoke  
Hampshire  
RG22 4PD

All correspondence should be sent to the following:

Motorola  
European Intellectual Property Operations  
Midpoint  
Alencon Link  
Basingstoke  
Hampshire  
RG21 1PL  
England

Please advise us of the filing and any pertinent information upon completion of filing the application, and send us a copy of the application you file.

Best regards,

A handwritten signature in dark ink, appearing to be 'SPH' or similar, written in a cursive style.

Susan

Enc.